


This Document is the property of AML Communication, Inc. The information contained in this document shall not be reproduced, stored, released or made available to any third party without prior written authorization. Utilizing information contained in this document for the production of products without prior written authorization is strictly prohibited.

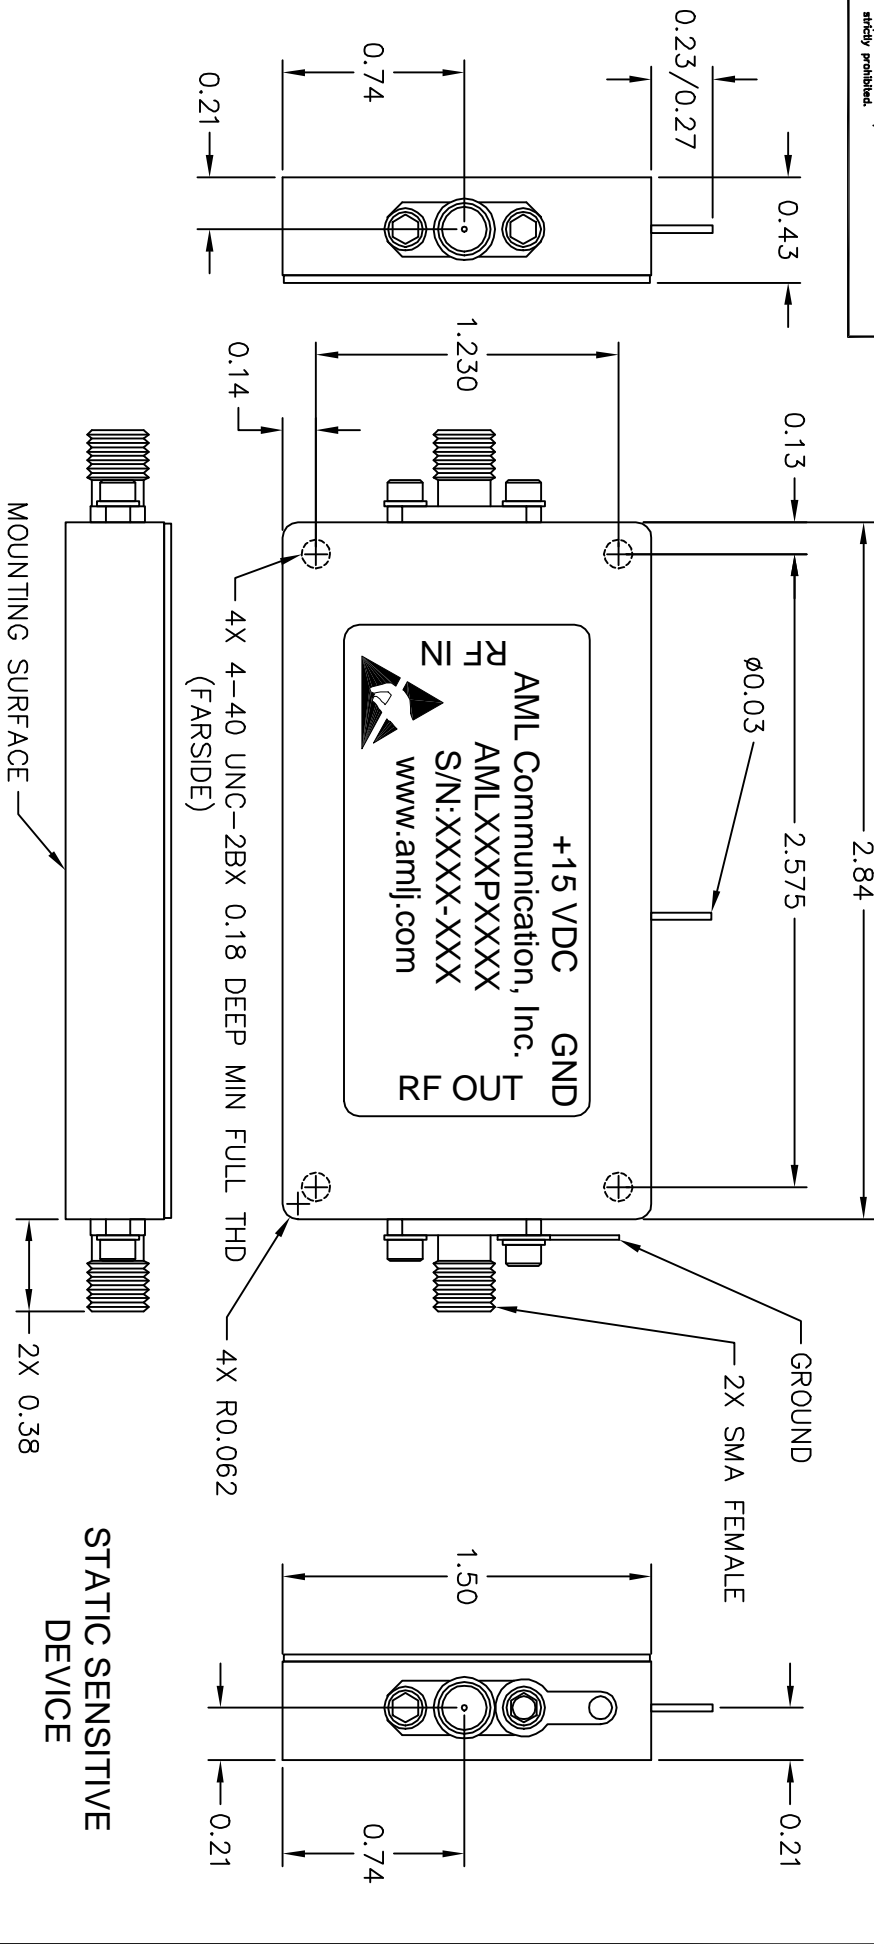

- NOTES:
1. MARK LABEL AS SHOWN. MARK SERIAL NUMBER AND DATE CODE AS DEFINED BY TRAVELER.
 2. UNIT MUST BE MOUNTED TO A SUITABLE HEATSINK DURING OPERATION.
 3. THE USE OF THERMALLY CONDUCTIVE GREASE BETWEEN THE HEATSINK AND AMPLIFIER IS RECOMMENDED.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ANGLES 2.5° X.XX & 0.005		DRAWN BY SH		CHECK BY SH	
MATERIAL ALUM ALLOY, 6061		DESIGNED BY SH		DATE	
FINISH NICKEL PLATE PER MIL-C-26074		ENGR		APPROVED	
DD NOT SCALE DRAWING		MFG ENGR		RELEASED BY:	
TITLE: OUTLINE, KP8 K-BAND, 2 WATT, CATALOG		SCALE: 1:1		DATE: 2/26/04	
GENERAL FABRICATION NOTES: (UNLESS OTHERWISE SPECIFIED) 1. DIMENSIONS APPLY AFTER FINISH. 2. DIMENSIONS SHARP EDGES .005 MAX. 3. 63° MAX. MACHINE FINISH. 4. INTERPRET DRAWING PER ANSI/ASME Y14.5M-1994		BOM NUMBER CAMARILLI, CALIFORNIA, USA		SHEET NUMBER 1 OF 1	
		DRAWING NUMBER 002-0368		SIZE B	
				REV -	

REVISIONS			DATE	APPROVED
ECHB	REV	DESCRIPTION	2/26/04	M. CALVANI
-	-	RELEASE		